

MVHB-260 series

HAND LEVER VALVE



mindman

Specification

Model	MVHB-260(V)-4TV MVHB-260(V)-4TV-SP	MVHB-260(V)-4TV* MVHB-260(V)-4TV*-SP
Bore No.	8A	
Port size	Rc1/4	
No. of port	5	
No. of position	2	3
Medium	Air	
Operating pressure range	0~0.8 MPa	
Effective orifice	18 mm ²	
Ambient temperature	-5~+60°C (No freezing)	
Weight	219 g	278 g

Order example

MVHB-260V-4TVC-SP-G

MODEL

BODY
WIDTH

4way

Blank: Standard type
V: Vertical type
※ Vertical type can be used with MVSE-260 manifold (Refer to page A-26)

VALVE TYPE


Blank: 5/2
C: Close center (5/3)
P: Pressure center (5/3)
R: Exhaust center (5/3)

SPRING
RETURN



PORT THREAD

Blank: Rc thread
G: G thread
NPT: NPT thread


MVHB-260-4TV




MVHB-260-4TV-SP

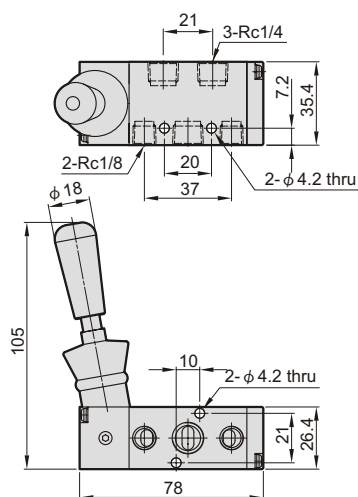



MVHB-260-4TVC




MVHB-260-4TVP




MVHB-260-4TVR

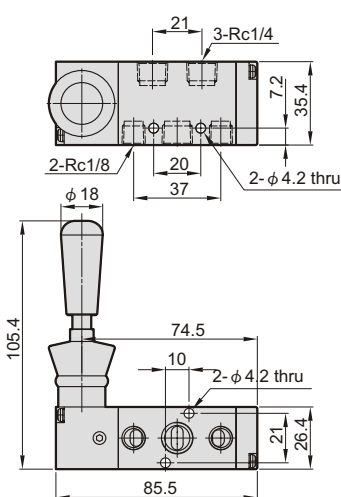



MVHB-260-4TVC-SP



MVHB-260-4TVP-SP



MVHB-260-4TVR-SP

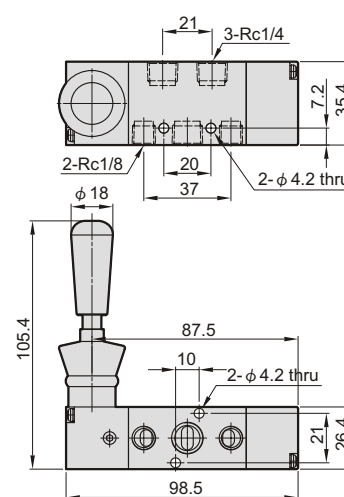


mindman



MVHB-260 Dimensions

HAND LEVER VALVE


MVHB-260V-4TV




MVHB-260V-4TV-SP

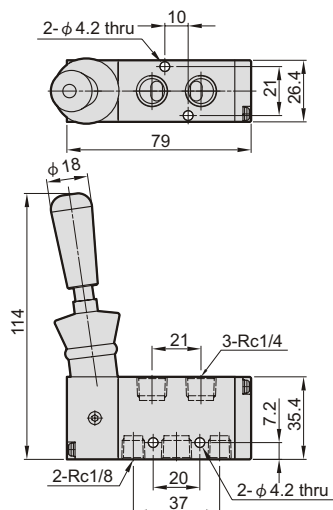



MVHB-260V-4TVC




MVHB-260V-4TVP




MVHB-260V-4TVR

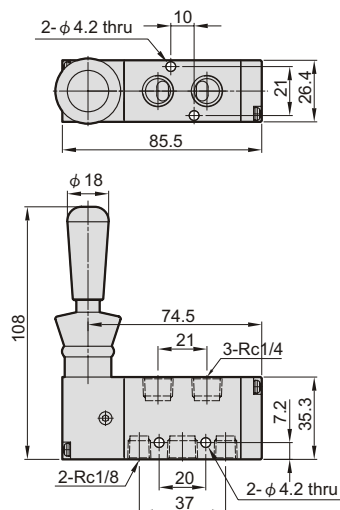

MVHB-260V-4TVC-SP



MVHB-260V-4TVP-SP



MVHB-260V-4TVR-SP

